

Light duty nail expanding anchor for solid masonry and hollow wall constructions.

FEATURES

- Multiple style heads for versatility
- Small diameter hole for discreet fixings
- Fully assembled through fixing - fast fixing in repetitive applications
- Nylon body provides insulation between expander nail and work surface
- no bimetal corrosion.

MATERIALS

Body - Nylon

Expander Nail - Carbon Steel or Stainless Steel.

SURFACE FINISH

Expander Nail - Carbon Steel - Zinc electroplated passivated blue chromate conversion coating.


DURABILITY

Nylon body temperature resistance up to +80°C in service.


Installation temperature -10°C to +40°C.

APPLICATIONS


Signs, conduit brackets, electrical fittings, radiators, partition boards.

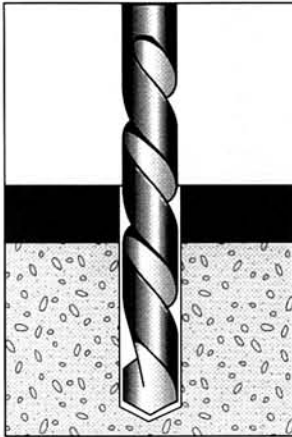



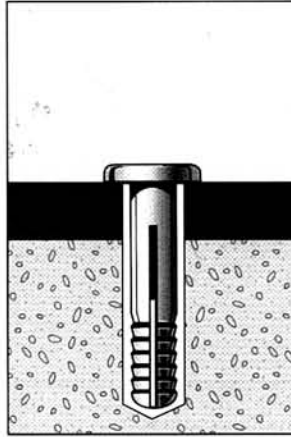

1. Drill the correct size hole using the fixture as a template.

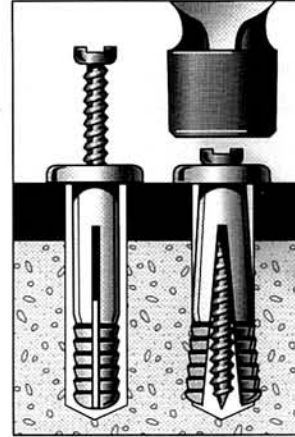

2. Insert the NYLON ANCHOR through the fixture to be fastened and push the anchor in until the head of the anchor is tight against the fixture.



3. Tap screw nail home with a hammer.

Head Style	Order No.	Anchor Diam. (mm)	Drill Bit Diam. (mm)	Anchor Length (mm)	Head Diam. (mm)	Qty. per Box	Rec. Working Load (kN)	
							tension	shear
 Countersunk	NAC34	5	5	25	10	100	0.2	0.5
	NAC44	6.5	6.5	25	11	100	0.3	0.8
	NAC46	6.5	6.5	38	11	100	0.3	0.8
	NAC48	6.5	6.5	50	11	100	0.3	0.8
	NAC412	6.5	6.5	75	11	100	0.3	0.8
 Mushroom	NAM520	5	5	20	11	100	0.2	0.5
	NAM34	5	5	25	11	100	0.2	0.5
	NAM44	6.5	6.5	25	14	100	0.3	0.8
	NAM46	6.5	6.5	38	14	100	0.3	0.8
	NAM48	6.5	6.5	50	14	100	0.3	0.8
 Round	NAR525	5	5	25	9	100	0.2	0.5
	NAR36	5	5	38	9	100	0.2	0.5
	NAR44	6.5	6.5	25	11	100	0.3	0.8
	NAR46	6.5	6.5	38	11	100	0.3	0.8
	NAR48	6.5	6.5	50	11	100	0.3	0.8
 Flush	NAF525	5	5	25	11	100	0.2	0.5

