

The accepted method of light weight screw fixing into solid masonry.

FEATURES

- Each Nylon Plug will accept a wide range of screw sizes
- Stainless Steel and Brass screws used with Nylon Plugs offer full corrosion resistance
- High expansion capabilities insures strong fixings in a variety of materials.

MATERIALS

Nylon

DURABILITY


Nylon body temperature resistance up to +80°C in service.
Installation temperature -10°C to 40°C

APPLICATIONS


Facia boards, plumbing installations, shelf brackets, ceiling hangers, switch and junction boxes.




INSTALLATION

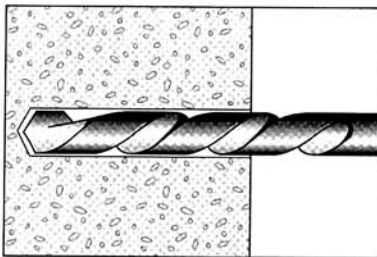

1. Drill th correct diameter and depth hole.
Clean the hole thoroughly.

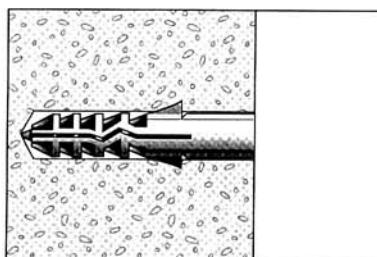

2. Insert the NYLON PLUG into the hole until flush with the surface.

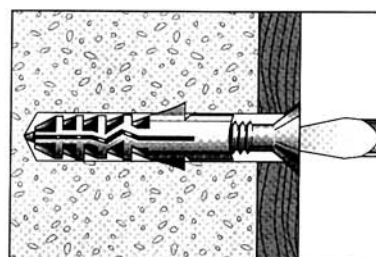

3. Pass the wood screw through the fixture and into the NYLON PLUG. Tighten with a screwdriver.
Note: Screw length = length of NYLON PLUG + thickness of fixture.

Order Number	Plug/ Hole Diam. (mm)	Length/ Hole Depth (mm)	Wood Screw Size		Qty. per Box	Rec. Working Load (kN) in 25MPa concrete in tension
			(mm)	gauge		
DNP5	5	25	2.5	5-7	100	0.3
DNP6	6	30	3.5-5	6-9	100	0.5
DNP7	7	35	4.5-5.5	9-12	100	0.7
DNP8	8	40	4.5-6	10-14	100	0.8
DNP10	10	50	6-8	14-18	50	1.2
DNP12	12	60	8-10	18-24	25	1.8

