


MUSHROOM HEAD SOLID ALUMINIUM RIVETS

Length:	1/4	3/8	1/2	5/8	3/4	1	1 1/2
D	1/8	*	*	*	*	*	
I	3/16		*	*	*	*	*
A	1/4	*	*	*	*	*	


APPROX QUANTITY PER KG

	1/8	3/16	1/4
1/4			690
3/8		1162	640
1/2	3264	940	508
5/8	2640	880	415
3/4	2330	725	370
1		630	370
1 1/2		460	



The solid aluminium rivet is produced from 6061 T⁶ alloy. Commonly used in aluminium boat manufacturing as they have good mechanical properties and corrosion resistance.

Please contact our nearest Office or discuss your requirements with our Sales Representative.

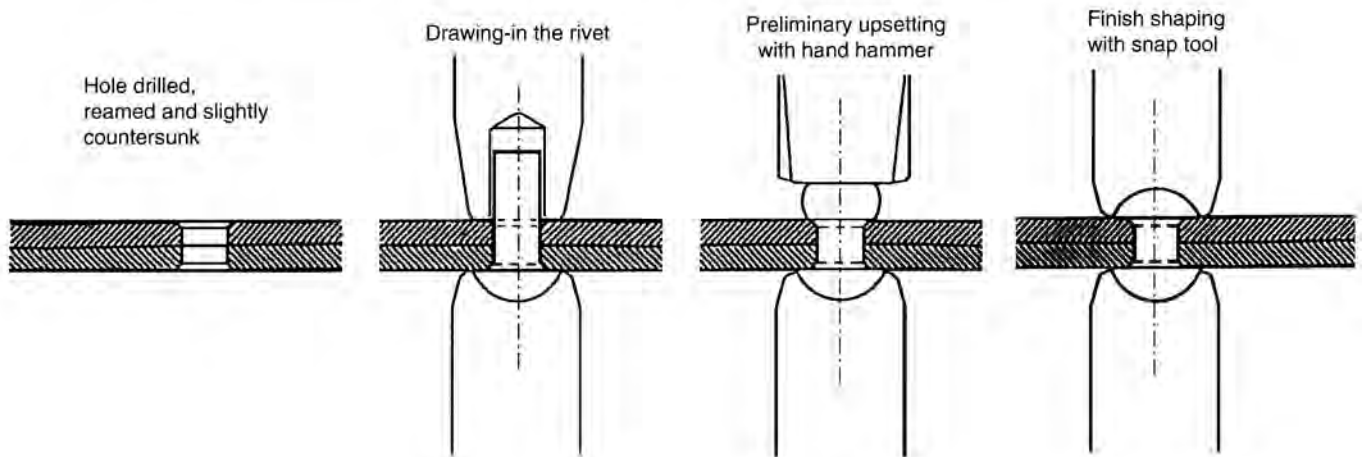


TINSMENS RIVETS (GALVANISED)

Size No.	Length	Shank Diameter		Head Diameter		Head Thickness	
		Max In.	Min In.	Max In.	Min In.	Max In.	Min In.
4	5/32	.095	.089	.190	.178	.035	.025
5	11/64	.109	.103	.220	.208	.036	.026
6	3/16	.109	.103	.220	.208	.036	.026
7	13/64	.120	.118	.248	.236	.039	.029
8	7/32	.124	.118	.248	.236	.039	.029
9	1/4	.136	.130	.280	.272	.042	.032
10	17/64	.150	.144	.300	.288	.046	.036
11	9/32	.150	.144	.300	.288	.046	.036
12	5/16	.164	.158	.328	.316	.049	.043
13	11/32	.180	.174	.360	.348	.053	.043
14	11/32	.200	.194	.400	.388	.058	.048
15	25/64	.206	.200	.412	.400	.060	.050
16	7/16	.220	.214	.440	.428	.063	.053
17	15/32	.228	.222	.456	.444	.065	.055
18	1/2	.254	.248	.508	.496	.072	.062
20	17/32	.284	.278	.568	.556	.079	.069

Packed in cartons of 1000

Stock sizes 6, 8, 10, 11, 12, 13, 14



NOTE: Minimum quantities are required for this range of products and are available on an indent basis only.

